


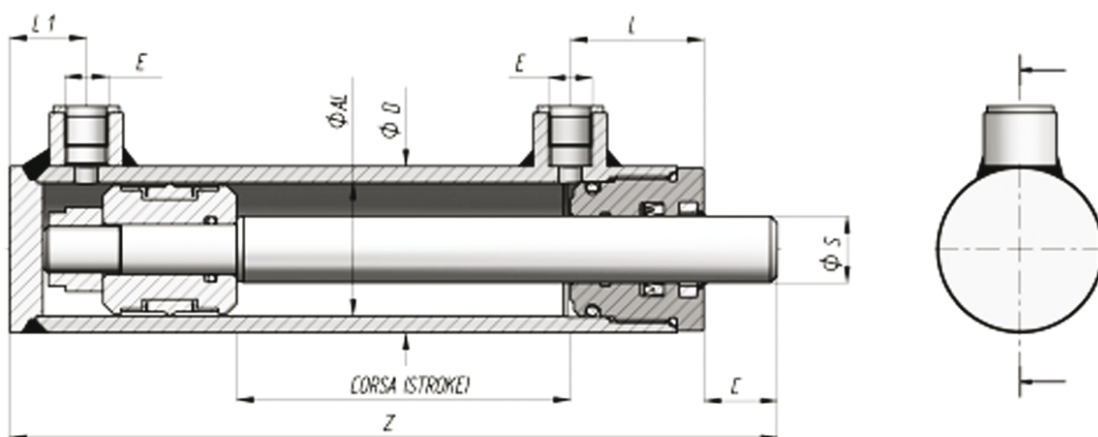

CILINDRO DOPPIO EFFETTO SERIE XE 250 BAR

Velocità max. 0,5 m/s, pressione di picco max. 250 bar, pressione continua max. 140 bar, temperatura C°: - 25°C + 80°C.

Ø D	Ø AL	Ø S	Corsa	Articolo	Z	C	E	L	L1	Kg	Spinta A 100 Bar Kg	Tiro A 100 Bar Kg
70	60	30	100	XEA060BA030A0100	260	22	3/8"	43	26	4,82	2.826	2.120
			150	XEA060BA030A0150	310					5,55		
			200	XEA060BA030A0200	360					6,20		
			250	XEA060BA030A0250	410					6,87		
			300	XEA060BA030A0300	460					7,55		
			350	XEA060BA030A0350	510					8,20		
			400	XEA060BA030A0400	560					8,90		
			450	XEA060BA030A0450	610					9,53		
			500	XEA060BA030A0500	660					10,25		
			550	XEA060BA030A0550	710					10,86		
			600	XEA060BA030A0600	760					11,60		
			800	XEA060BA030A0800	960					14,26		
			1000	XEA060BA030A1000	1160					17,00		
70	60	35	100	XEA060BA035A0100	260	23	3/8"	50	30	5,07	2.826	1.864
			150	XEA060BA035A0150	310					5,85		
			200	XEA060BA035A0200	360					6,60		
			250	XEA060BA035A0250	410					7,40		
			300	XEA060BA035A0300	460					8,15		
			350	XEA060BA035A0350	510					8,94		
			400	XEA060BA035A0400	560					9,72		
			450	XEA060BA035A0450	610					10,47		
			500	XEA060BA035A0500	660					11,25		
			550	XEA060BA035A0550	710					12,00		
			600	XEA060BA035A0600	760					12,81		
			800	XEA060BA035A0800	960					15,87		
			1000	XEA060BA035A1000	1160					19,93		
70	60	40	200	XEA060BA040A0200	360	23	3/8"	50	30	7,25	2.826	1.570
			250	XEA060BA040A0250	410					8,14		
			300	XEA060BA040A0300	460					9,03		
			350	XEA060BA040A0350	510					9,90		
			400	XEA060BA040A0400	560					10,79		
			450	XEA060BA040A0450	610					11,64		
			500	XEA060BA040A0500	660					12,52		
			550	XEA060BA040A0550	710					13,45		
			600	XEA060BA040A0600	760					14,30		
			800	XEA060BA040A0800	960					17,82		
			1000	XEA060BA040A1000	1160					21,40		

N.B. A richiesta si costruiscono cilindri su specifiche del cliente.